



Thank-you for your interest in Safetech's exciting new stretch tape easy wrapper – one product in our large range of materials handling products. This e-mail attachment has been sent to provide you with an overview of the Stretch Tape Wrapper and to help you make a more informed purchasing decision. In the pages below you will find:

- An introduction to the product
- Detailed product information
- Technical Specifications
- Product pictures
- A link to the Safetech website for further information

## **STRETCH TAPE EASY WRAPPER**

**STRETCH TAPE EASY WRAPPER** is the unique semi automatic applicator designed to apply 3M stretchable load containment tape in a unique multiple X or banding pattern. It is the machinery component of the Stretch Tape Pallet Stabilising System developed jointly by SAFETECH Australia and the giant 3M Corporation of the USA.

**STRETCH TAPE EASY WRAPPER** is efficient and highly effective at preventing back strain and injury, which are the most common of all workplace injuries (1994, Worksafe Australia). It is designed to eliminate the dangerous and time-consuming practice of stretch tape application by hand. As employers have become more aware of occupational health and safety, tape application by hand has become less and less viable.



**High load  
holding force**

**3M stretchable tape** is an adhesive coated tape which when dispensed through Safetech's powered prestretch assembly is stretched to six times its original length. This stretching process actually increases the strength of the tape while diminishing its adhesive properties.

Using the Safetech Stretch Tape wrapper to apply 3M stretchable tape is easy for any pallet configuration. It provides efficient tape usage and a stable pallet load that can be transported and stored with confidence.

3M stretchable tape provides load stability equivalent to or better than stretch film and has been used to wrap a wide variety of products that can then be safely freighted.

Touch pad controls enable an operator to easily select the optimum pattern for each pallet load. Options include the ability to program simple banding suitable for in-house storage or full multi-x patterns that provide maximum load stability.

### **95% WASTE REDUCTION WITH 3M STRETCHABLE TAPE.**

There are few products that can offer such a dramatic benefit but the unique properties of the patented 3M tape allow 95% or more waste reduction by volume versus stretch film or netting. Plus the 3M Stretch Tape is biodegradable.


The best way to reduce waste is to eliminate it at source and this is exactly what the use of 3m stretchable tape achieves. Only a handful of tape is needed to achieve complete load stability.

The costs of handling and disposing of waste film and netting is dramatically lowered when 3M stretchable tape is used. 3M tape is simple to apply and easy to remove.



Compare the waste of 50 pallets wrapped in film (left) versus the waste resulting from 50 pallets wrapped in 3M Stretch Tape using Safetech's Stretch Tape Easy Wrapper.



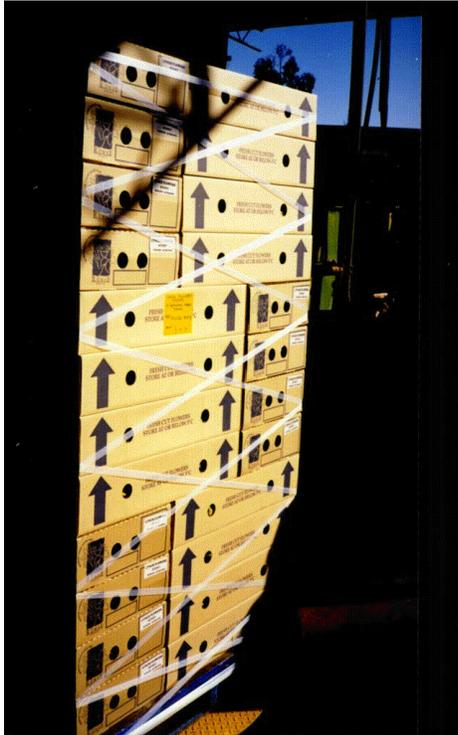

## FLOW THROUGH VENTILATION PROTECTS PERISHABLE PRODUCTS.

3M Stretch Tape offers total air flow prolonging the shelf life of fruit and vegetable products and avoiding damage to packaging that can occur when heated products “sweat” inside plastic film wrap

For any palletised load that requires heating or cooling, such as dairy foods, the use of Stretch Tape can save days in production time.

Unlike other products used for load ventilation, 3M Stretch Tape is easy to apply using the Safetech Stretch Tape wrapper. Removal of the tape is also simple and waste almost negligible.

### **Specifications:**

Capacity:	2000kg
Turntable diameter:	1400mm
Turntable height above floor:	110mm
Maximum wrapping height:	2500mm
Maximum load width:	1400mm square
Overall length:	2700mm
Overall width:	1400mm
Overall height:	3270mm*
Shipping weight:	500kg approx.
Power supply:	240 V, 50hz, single Phase power.

\*2650mm Mast also available

Designed and Manufactured by

**Safetech Pty Ltd**

P.O.Box 360, Moe

Victoria 3825

Telephone: 1800 674566

Fax: (03) 5127 4431

Web site:

[www.safetech.com.au](http://www.safetech.com.au)

E-mail:

Safetech@safetech.com.au

